

PK 41002 MH

PALFINGER

LIFETIME EXCELLENCE


A PERFECT COMBINATION OF POWER AND PROFITABILITY




PK 41002 MH

HIGH PERFORMANCE



C


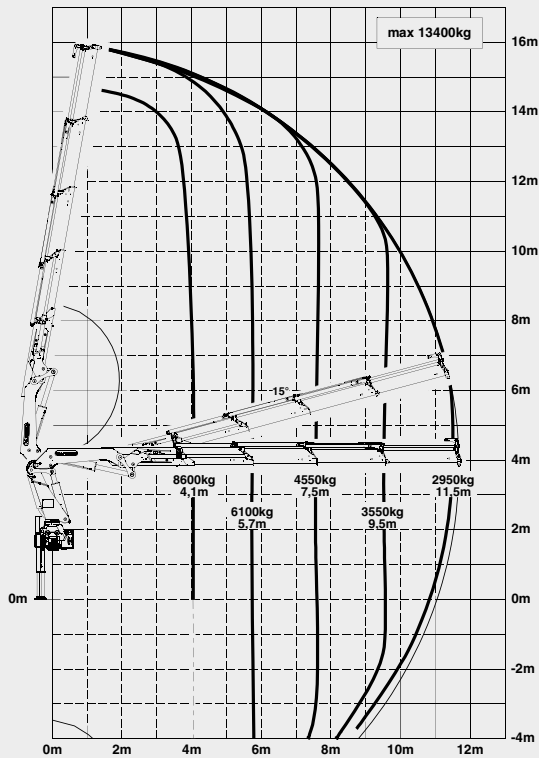


D

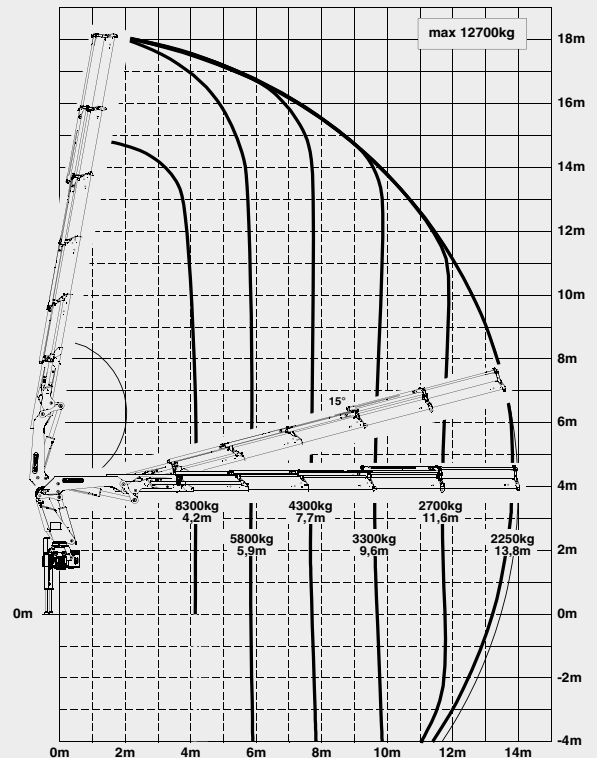

DIMENSIONS

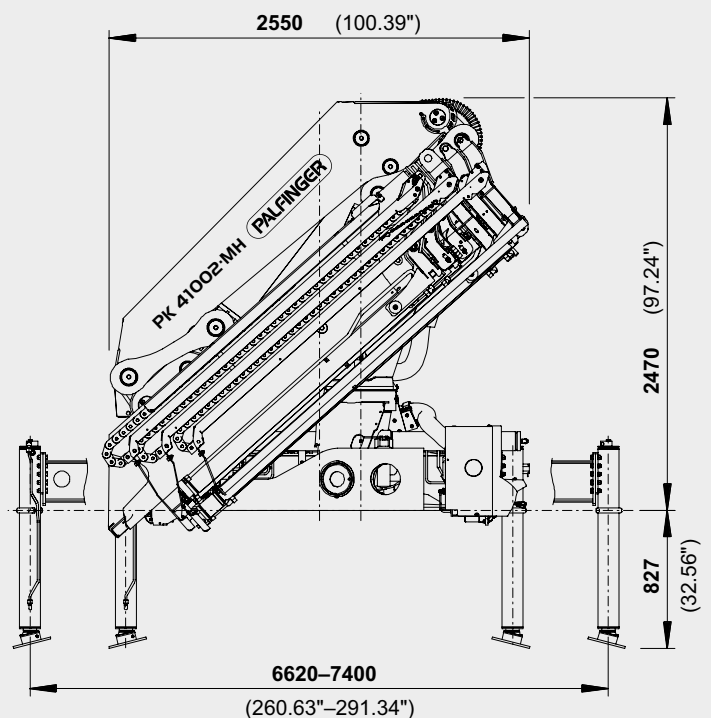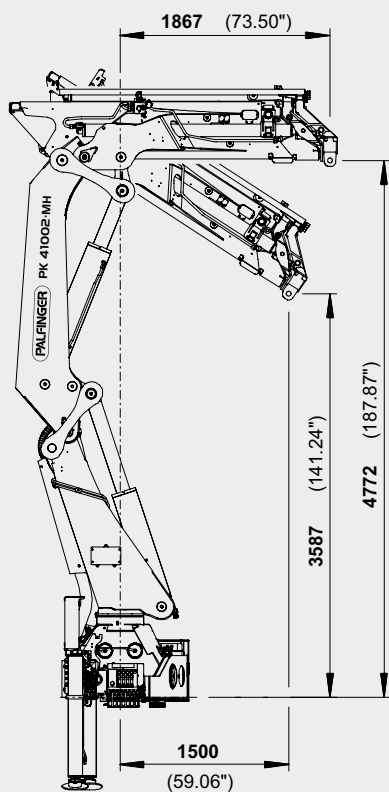

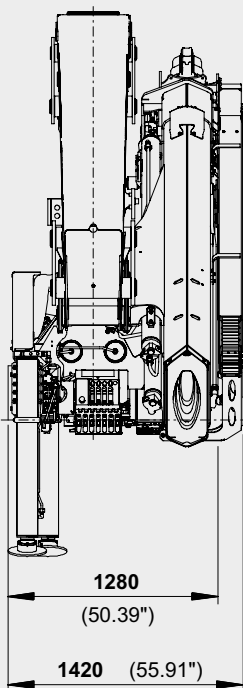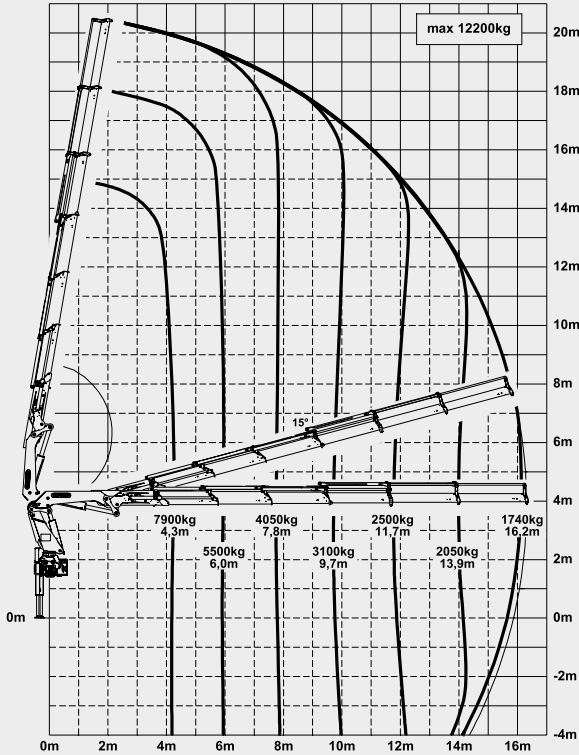

➤ Increased operating times due to low-maintenance extension system



➤ High value retention due to KTL coating

➤ Additional applications due to Power Link Plus

➤ Maximum utilisation of the working range due to HPSC

➤ Designed and optimised for Non CE markets

TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD4/B3)

Max. lifting moment	38.4 mt/376.7 kNm	277820 ft.lbs
Max. lifting capacity	14600 kg/143.2 kN	32190 lbs
Max. hydraulic outreach	16.3 m	53' 6"
Max. manual outreach	23.3 m	76' 5"
Slewing angle	400°	
Slewing torque	4.0 mt/39.2 kNm	28940 ft.lbs
Stabiliser spread (std./max.)	6.6 m/7.4 m	21' 8"/24' 3"
Fitting space required (std.)	1.28 m	4' 2"
Width folded	2.55 m	8' 4"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 60 l/min	15.9 US gal./min
	to 80 l/min	21.1 US gal./min
Dead weight (std.)	3800 kg	8380 lbs



LIFETIME EXCELLENCE

PALFINGER LOADER CRANES ARE CONVINCING DUE TO THEIR SUPERIOR LIFE-CYCLE PERFORMANCE. THEY ARE THE MOST ECONOMICAL AND ALSO THE MOST RELIABLE OVER THE ENTIRE PRODUCT LIFE. FROM SOLUTION FINDING TO RESALE.

**BETTER
SOLUTIONS**

**BETTER
EFFICIENCY**

**BETTER
ERGONOMICS**

**HIGHER VALUE
RETENTION**



**HIGHER
AVAILABILITY**

**HIGHER
SERVICEABILITY**

**BETTER
ECOLOGY**

**MORE
RELIABILITY**

For further information please visit: www.palfinger.com/thebrand